

WESTERN RED CEDAR

SHAKE AND SHINGLE PRODUCTS

Renewable Resource - Cedar roofing and siding is made from a resource that can be planted, harvested and then replanted.
Biodegradable Cedar fibers turn into non-toxic dirt and enrich the soil as they decompose.
Energy Efficient Cedar roofing and siding has a higher insulation value than of any of the wood substitutes.

Handsplit and Resawn Shakes

This high quality shake features a rough split face and sawn back. Popular on traditional, ranch, historical and vacation homes or non-residential structures designed to blend with the natural and/or rustic surroundings.

- Recommended Use** For walls and roofs 4:12 pitch and steeper and where a premium quality product is needed or desired.
- Description** Lengths 18-inch and 24-inch; width 4" minimum, 14" maximum; thickness 1/2" (medium) and 3/4" (heavy).
- Roof Exposure** 7 1/2" for 18-inch shakes; 10" for 24-inch shakes
- Wall Exposure** Single course: 8 1/2" for 18-inch shake; 11 1/2" for 24-inch shake. Double course: 14" for 18-inch shake; 18" for 24-inch shake
- Grades** Premium - Clear heartwood; 100% edgegrain; no defects.
No.1 - Clear heartwood; 20% maximum flat grain.



Sold by the sq (5 bundles per/sq)

Tapersawn Shakes

A Tapersawn Red Cedar Shake falls between a sawn shingle and a split shake. Both surfaces are sawn but are not as precisely manufactured as shingles. Taper sawn shakes have thicker butts, and this presents a more textured appearance.

- Recommended Use** For walls and roofs 4:12 pitch and steeper and where a premium quality, durable and uniform appearance is desired.
- Description** Lengths 18-inch and 24-inch; width 4" minimum, 14" maximum; thickness 5/8"
- Roof Exposure** 7 1/2" for 18-inch shakes; 10" for 24-inch shakes
- Wall Exposure** Single course: 8 1/2" for 18-inch shake; 11 1/2" for 24-inch shake. Double course: 14" for 18-inch shake; 18" for 24-inch shake
- Grades** Premium - Clear heartwood; 100% edgegrain; no defects.
No.1 - Clear heartwood; 20% maximum flat grain.



Sold by the sq (5 bundles per/sq)

Why Cedar is the Best Choice...

Survives 130 mph Hurricane Force Winds
Highly Resilient in Earthquakes
Aesthetically Pleasing – Lasting Value
Pressure Preservative Treatment Prevents Decay

More products and services
 on back →

High Insulation Value – Low Energy Costs
Withstands Pounding Hail Storms
20/25 Year Warranty Available
Protects the Environment

DIRECT Cedar Supplies

Get the Direct Advantage

Mailing Address:
 Box 460, P.O. Box 8000
 Abbotsford, BC Canada
 V2S 6H1
Sales: 1-877-850-1767





Sold by the sq (4 bundles per/sq)

Shingles

Shingles have smooth sawn backs and fronts. Shingles are produced by sawing blocks on a shingle machine, tilting the block each cut to produce tapered pieces and then trimming edges.

Recommended Use	For walls and roofs 4:12 pitch and steeper and where a premium quality, uniform product is needed or desired.
Description	Lengths 16-inch; 18-inch and 24-inch; width 4" minimum, thickness 5/2"
Roof Exposure	5" for 16-inch shingles; 5 1/2" for 18-inch shingles; 7 1/2" for 24-inch shingles
Wall Exposure	Single course: 8 1/2" for 18-inch shake; 11 1/2" for 24-inch shake. Double course: 14' for 18-inch shake; 18" for 24-inch shake
Grades	No.1 - Clear heartwood; 100% edgegrain; no defects. No.2 – Limited sapwood and flatgrain allowed




Sold by the box

Sidewall Shingles – Rebutted & Rejointed

Manufactured from Number 1 Grade Blue Label or Number 2 Grade Red label cedar shingles, trimmed for parallel edges with butts sawn at right angles. Available in both sawn and sanded face textures Natural, primed white, primed gray, or special order colors.

Recommended Use	For walls where a premium quality, uniform product is needed or desired.
Description	18-inches
Wall Exposure	Single course: 8" maximum for 18-inch shake. Double course: 14" maximum for 18-inch shake.
Grades	No.1 - Clear heartwood; 100% edgegrain; no defects. No.2 – Limited sapwood and flatgrain allowed
Pre-stain and Primed Options	Primed white or gray, 1 coat Solid or Semi-Solid Acrylic or Oil, 2 coat Solid Acrylic or Oil

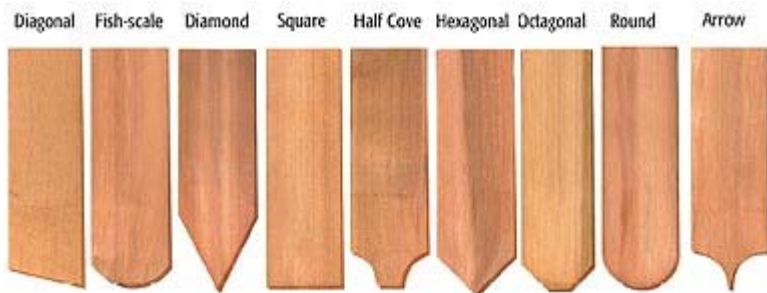

Sold by the box (96 shingles per/box)

Fancy Butt Sidewall Shingles

These shingles are 5" wide and are manufactured from 16" and 18" lengths. Clear heartwood; 100% edge grain; no defects.

Recommended Use	For walls where a premium quality, uniform product is needed or desired.
Description	18-inches
Wall Exposure	Exteriors: 7 1/2" maximum. Interiors: 10" maximum.
Grades	No.1 - Clear heartwood; 100% edgegrain; no defects. No.2 – Limited sapwood and flatgrain allowed
Pre-stain and Primed Options	Primed white or gray, 1 coat Solid or Semi-Solid Acrylic or Oil, 2 coat Solid Acrylic or Oil

Treatments Available

Kiln Dried – Moisture removal
CCA – Wood preservative
CLASS C or B Fire – Fire retardant

DIRECT Cedar Supplies
Get the Direct Advantage

Mailing Address:
Box 460, P.O. Box 8000
Abbotsford, BC Canada
V2S 6H1
Sales: 1-877-850-1767

